


How to mount Kingpin Remote Control System (KP300) on a Crown Electric Screen

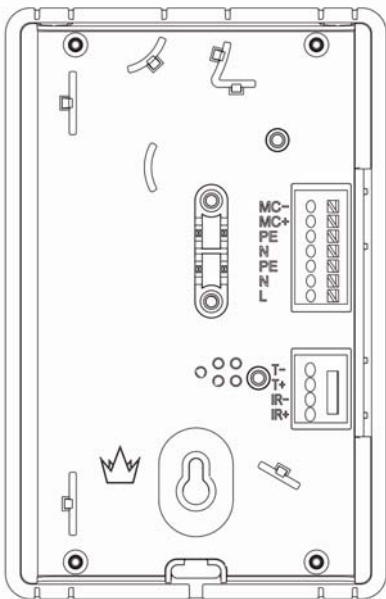

Make sure that no electric power is connected when mounting the control box to the screen!

Remove the cover on the backside of the control box with the 4 screws.

Push down the button next to the hole on the socket with a screwdriver when connecting the cord. Using a pair of pliers when inserting the cord will make it easier.

The cords **to the motor** shall be connected as follows:

MC-	Connect the brown cord
MC+	Connect the black cord
PE/⬇️	Connect the yellow/green cord (earth)
N	Connect the blue cord

The cords **from the electric socket** shall be connected as follows:

PE/⬇️	Connect the yellow/green cord (earth)
N	Connect the blue cord
L	Connect the brown cord

The last four holes (T-, T+, IR- and IR+) are used to connect other devices, see operation guide.

When all cords are connected mount the cover back. The cover works as a holder for the electric cords. Tighten the screws, but not too hard so that the plastic cover breaks.

You can now use the equipment! If the remote control (the hand control) does not work, you need to pair the units, see the operation guide for instruction (download on www.kingpinscreens.nl). If the control box does not work, check the cord connections.